



No. 6, Hejiang Road, Jhongli City,
Taoyuan County, TAIWAN
Tel: +886-3-452-5188
Fax: +886-3-462-9588
www.luxnetcorp.com.tw

1310nm 1.25Gbps 5pin PIN-TIA

DI1F-8053-3CP Series

TYPE NAME:DI1F-8053-3CP

Product Description:

The LuxNet DI1F-8053-3CP is designed for high-speed, high-performance GE-PON communication applications. This device integrates our high-speed 1310 nm PIN detector with a 1.25G trans-impedance amplifier (TIA) and capacitors into a TO-46 header with cap window. The PIN-TIA assembly can be integrated with a bi-directional fiber receptacle housing to receive light from fiber through a receptacle into the PIN detector with high coupling efficiency.

Product Specifications:

Absolute Maximum Ratings (T = 25°C):

Parameter	Symbol	Unit	Min.	Max.	Note
Operating Temperature	T _{op}	°C	-40	85	
Storage Temperature	T _{stg}	°C	-40	100	
Solder Reflow Temperature		°C		260	10 seconds max.
Power Supply Voltage	V _p	V	-0.5	6	
Optical Power	P _{in}	dBm		5	

Electro-Optical Characteristics (T = 25°C, unless noted otherwise):


Parameter	Symbol	Unit	Min.	Typ.	Max.	Test Condition
Supply Voltage	V _{cc}	Volts	3.0	3.3	3.6	
Supply Current	I _{cc}	mA	23	28	35	P _{in} = 0 μW, R _L = 50Ω
Output Voltage (differential)	V _{out}	mV		275	500	P _{in} = 1.5 μW, R _L = 100Ω
Responsivity	R	KV/W		23		λ=1310nm P _{in} = 1.5 μW, AC Coupled, R _L = 50Ω
Upper -3dB Bandwidth	BW	MHz	730	812	893	R _L = 50Ω
Low frequency cut off	LFC	kHz	50	70	115	P _{in} = 1 μW
Sensitivity	S	dBm		-30	-29	λ=1310nm 2 ⁷ -1 PRBS, BER= 10 ⁻¹⁰
Saturation Power	P _{sat}	dBm		-3		
Wavelength	λ	nm	1100	1310	1650	
Rise/Fall Time	τ _r /τ _f	ps	200	300	400	20%-80%

- * Specifications are subject to change without notice.
- * Screening per customer-specified reject limits is available.

Version 1.1

DI1F-8053-3CP (PIN-TIA)

Dimensions: (mm)
All dimensions are nominal

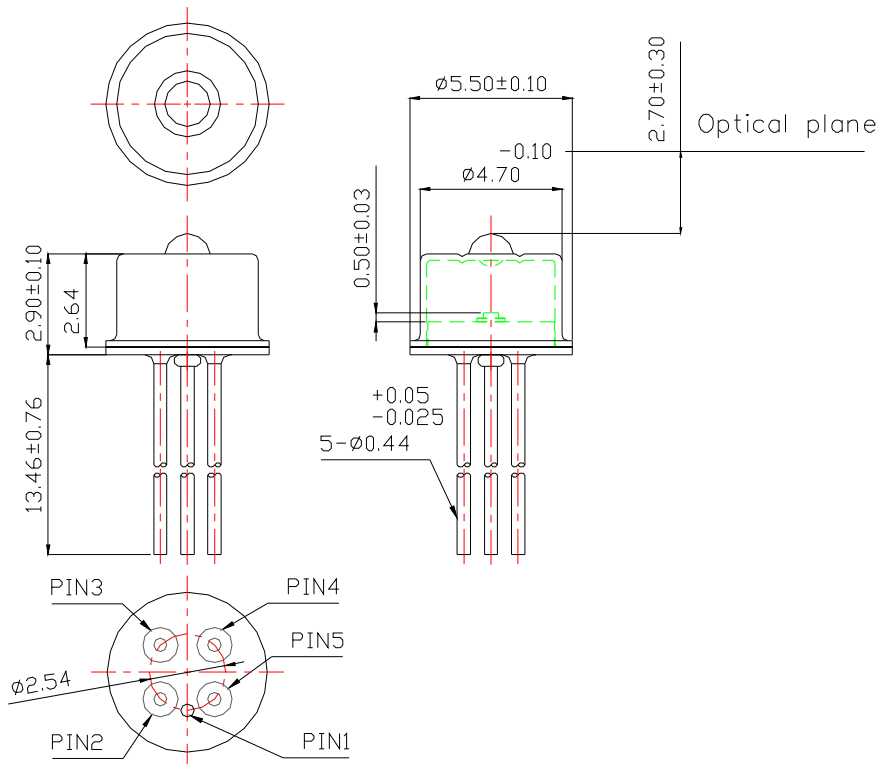

PINOUT

DI1F-8053-3CP	
Number	Function
1	Gnd
2	Non-Inverted Output(D+)
3	Vcc
4	Current Sink(I _{mon})
5	Inverted Output(D*)

* Specifications are subject to change without notice.
* Screening per customer-specified reject limits is available.