



No. 6, Hejiang Road, Jhongli City,
Taoyuan County, TAIWAN
Tel: +886-3-452-5188
Fax: +886-3-462-9588
www.luxnetcorp.com

1310 nm 155 Mbps PIN-TIA (3.3V/5.0V)

DI6F-8082-x Series

TYPE NAME: DI6F-8082-6A

Product Description:

The LuxNet DI6F-8082-x (3.3V/5V) PIN-TIA is designed for high-speed, high-performance data communication and telecommunication applications. This device integrates our high-speed 1310 nm PIN detector with a STM1/OC3 trans-impedance amplifier (TIA) and capacitors into a TO-46 header with cap window. The product is designed for OC-3 long distance optical communication systems. The PIN-TIA assembly can be integrated with different types of ports engaged with a fiber connector to transmit the light from fiber through a receptacle into the PIN detector with high coupling efficiency.

Product Specifications:

Absolute Maximum Ratings (T = 25°C):

Parameter	Symbol	Unit	Min.	Max.	Note
Operating Temperature	T _{op}	°C	-40	85	
Storage Temperature	T _{stg}	°C	-40	100	
Solder Reflow Temperature	T _{stg}	°C		260	10 seconds max.
Power Supply Voltage	V _p	V		4.5	
Optical Power	P _{in}	dBm		5	

Electro-Optical Characteristics (T = 25°C, unless noted otherwise):


Parameter	Symbol	Unit	Min.	Typ.	Max.	Test Condition
Supply Voltage	V _{cc}	Volts	3.0	3.3	5.0	
Supply Current	I _{cc}	mA			32	P _{in} = 0 μW, R _L = 50Ω
Output Voltage (differential)	V _{out}	mV			1500	P _{in} = 10 μW, R _L = 50Ω
Responsivity	R	KV/W		55		λ=1310nm P _{in} = 7.5 μW, AC Coupled to R _L = 50Ω
Upper -3dB Bandwidth	BW	MHz	110	140		R _L = 50Ω
Sensitivity	S	dBm		-38	-36	λ=1310nm 2 ²³ - 1 PRBS, BER= 10 ⁻¹⁰
Peak Wavelength	λ _p	nm	1100	1310	1650	
Rise/Fall Time	τ _r /τ _f	ns	--	--	2.6/2.6	(20%-80%)

- * Specifications are subject to change without notice.
- * Screening per customer-specified reject limits is available.

Version 1.2

DI6F-8082-6A

Dimensions: (mm)
All dimensions are nominal

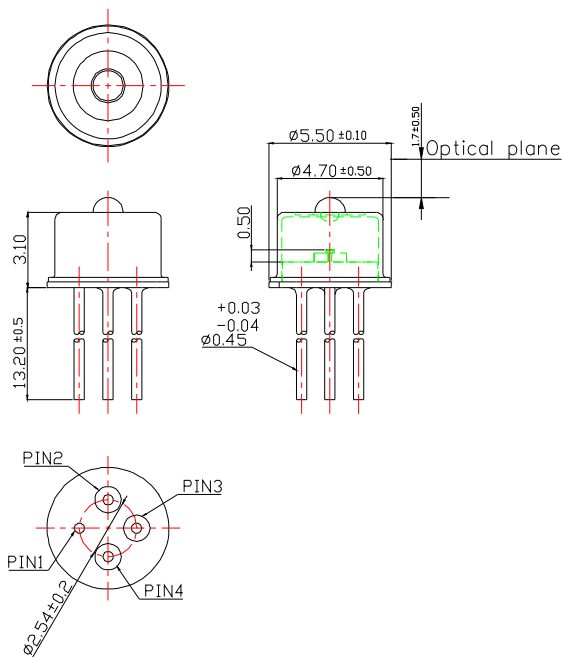

PINOUT

DI6F-8082-6A	
Number	Function
1	GND
2	Vcc
3	Inverted Output (D*)
4	Non-inverted Output (D)

* Specifications are subject to change without notice.
* Screening per customer-specified reject limits is available.