



No. 6, Hejiang Road, Jhongli City,
Taoyuan County, TAIWAN
Tel: +886-3-452-5188
Fax: +886-3-462-9588
www.luxnetcorp.com.tw

1310nm 155Mbps 4pin SC-ROSA for LED light source

DI6F-908x-x Series

TYPE NAME: DI6F-9081-6AB

Product Description:

The LuxNet DI6F-9081-6AB ROSA (Receiver Optical Sub-Assembly) is designed for a high-speed, high-performance data communication and telecommunication applications. This device integrates our high-speed 1310 nm PIN detector with a STM1/OC3 trans-impedance amplifier (TIA) and capacitors with a TO-46 header with cap window and optical port. The product is designed for OC-3 long distance optical communication systems. The optical port has a fiber connector that transmits light through an SC receptacle into the PIN detector with high coupling efficiency.

Product Specifications:

Absolute Maximum Ratings (T = 25°C):

Parameter	Symbol	Unit	Min.	Max.	Note
Operating Temperature	T _{op}	°C	-40	85	
Storage Temperature	T _{stg}	°C	-40	100	
Solder Reflow Temperature	T _{stg}	°C		260	10 seconds max.
Power Supply Voltage	V _p	V		4.5	
Optical Power	P _{in}	dBm		5	

Electro-Optical Characteristics (T = 25°C, unless noted otherwise):

Parameter	Symbol	Unit	Min.	Typ.	Max.	Test Condition
Supply Voltage	V _{cc}	Volts	3.0	3.3	5.5	
Supply Current	I _{cc}	mA		23	32	P _{in} = 0 μW, R _L = 50Ω
Output Voltage (differential)	V _{out}	V			1.2	P _{in} = 10 μW, R _L = 50Ω
Responsivity	R	KV/W		33.1		λ=1310nm P _{in} = 7.5 μW, AC Coupled to R _L = 50Ω
Upper -3dB Bandwidth	BW	MHz	93	110		R _L = 50Ω
Sensitivity	S	dBm		-36.0	-35.0	λ=1310nm (LED light source) 2 ²³ - 1 PRBS, BER= 10 ⁻¹⁰ Φ62.5um fiber
Peak Wavelength	λ _p	nm	1100	1310	1650	
Rise/Fall Time	τ _r /τ _f	ns		1.6/1.6	2.0/2.0	V _{cc} =3.3V; (20%-80%)

* Specifications are subject to change without notice.
Screening per customer-specified reject limits is available.


Version 1.5



No. 6, Hejiang Road, Jhongli City,
Taoyuan County, TAIWAN
Tel: +886-3-452-5188
Fax: +886-3-462-9588
www.luxnetcorp.com.tw

DI6F-9081-6AB (SC-ROSA)

Dimensions: (mm)
All dimensions are nominal

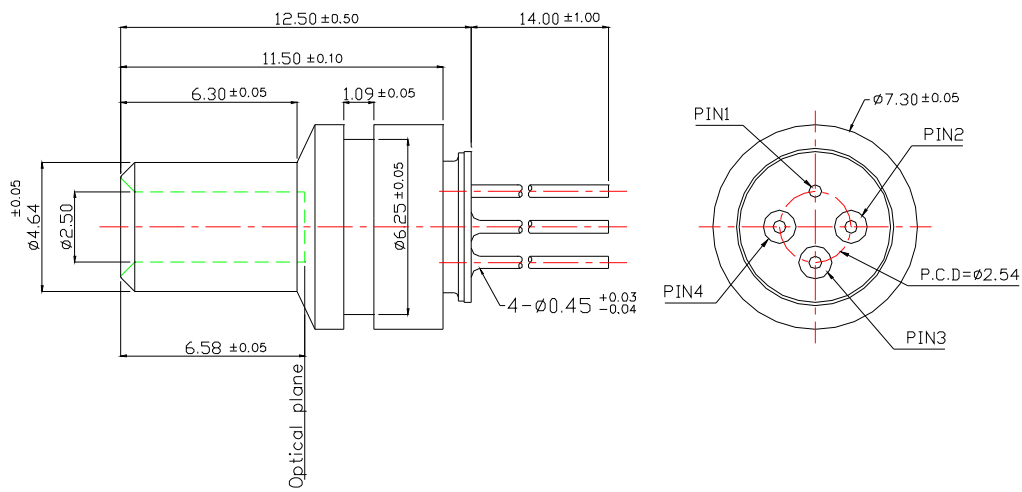

PINOUT

DI6F-9081-6AB	
Number	Function
1	Gnd
2	Vcc
3	Inverted Output (D*)
4	Non-Inverted Output (D)

* Specifications are subject to change without notice.
Screening per customer-specified reject limits is available.

Version 1.5