

10Gbps 1310nm DFB 4-Pin TO-56 (Preliminary)

L-TT-ED31-08 Series

TYPE NAME: L-TT-ED31-08

Product Description:

The LuxNet L-TT-ED31-08 TO-56 header assembly is designed for high speed, high performance data communication and telecommunication applications. This device is integrated with a 1310 nm 10Gbps DFB laser, a TO-56 header, a monitoring photodiode, and a lens cap. The product is designed for 10Gbps long reach and intermediate reach optical communication systems. This TO header assembly can be integrated with different types of ports that are engaged with a single mode fiber connector to provide good coupling efficiency as light generated by the DFB laser is transmitted into a single mode fiber.

Product Specifications:

Absolute Maximum Ratings

Parameter	Symbol	Unit	Min.	Max.	Note
Operating Temperature(Ta)	T _{op}	°C	-40	85	
Storage Temperature	T _{stg}	°C	-40	85	
Solder Reflow Temperature	STEM	°C	-	260	10 seconds max.
Maximum Power	P _o	mW	-	10	
Reverse Voltage	V _r	V	-	2	
Photodiode Forward Current	I _{pd}	mA	-	10	

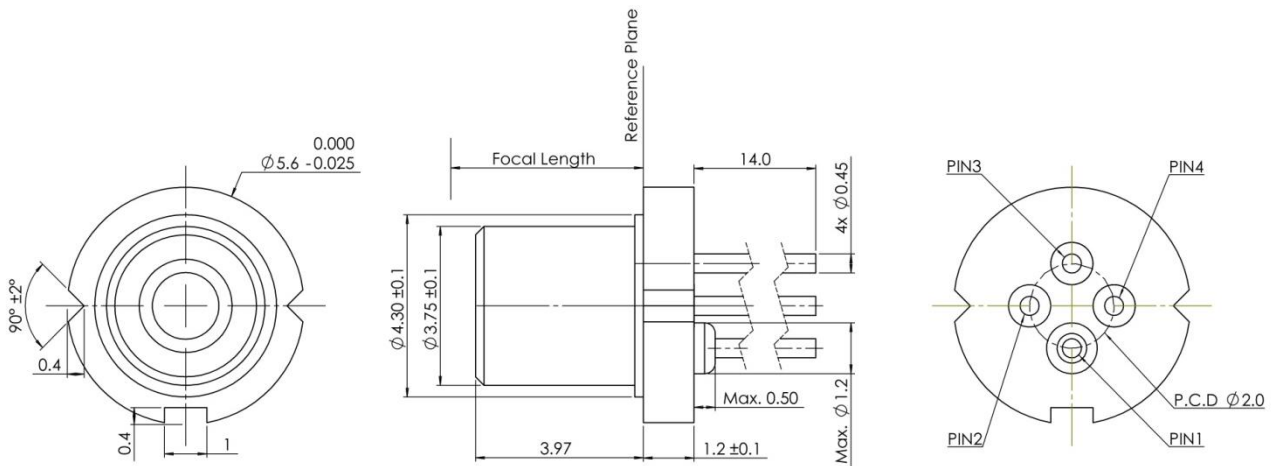
Electro-Optical Characteristics (Tc = 25°C, unless noted otherwise):

Parameter	Symbol	Unit	Min.	Typ	Max.	Test Condition
Threshold Current	I _{th}	mA	-	8	15	CW, Ta=25°C
Forward Voltage	V _f	V	-	1.2	1.5	CW, I _{th} +20mA
Slope Efficiency	SE	mW/mA	0.20	-	-	Average, I _{th} +5 mA to I _{th} +20 mA
Peak Wavelength	λ _p	nm	1307.5	1310	1311.5	CW, I _{op} =I _{th} +20mA
Spectral width	Δλ	nm	-	-	1	CW, I _{op} =I _{th} +20mA Scan resolution <0.1nm
Side Mode Suppression Ratio	SMSR	dB	35	-	-	CW, I _{op} =I _{th} +20mA
Rise / Fall Time	tr ,tf	ps	-	50/50	-	I _{th} +20 mA, 20-80%
Focal Point of Fiber Coupling	FL	mm	7.2	7.5	7.8	CW, maximum coupling to SMF (9/125), PC fiber without theta alignment

Photodiode Characteristics (Tc = 25°C, unless noted otherwise):

Parameter	Symbol	Unit	Min.	Typ	Max	Test Condition
Monitor Current	I _m	mA	0.1	-	1.0	CW, I _{th} + 20 mA ,
PD Dark Current	I _d	nA	-	-	100	V _r = 1.7V
PD Capacitance	C	pF	-	10	20	V _r = 5V @ 1MHz

L-TT-ED31-08

Dimensions: (mm)


PINOUT

L-TT-ED31-08	
Number	Function
1	PD Anode / Case
2	Laser Diode Cathode
3	Photodiode Cathode
4	Laser Diode Anode